

TW5382



TW5382 Smart GNSS Antenna for High Accuracy Timing

Overview

The TW5382 is a multi-band (L1/L2), multi-constellation integrated GNSS receiver and precision timing reference antenna. The TW5382 is capable of providing nanosecond-level timing accuracy to support the most demanding infrastructure applications.

Interference Resilience


The TW5382 incorporates a latest generation multi-band (L1/L2) GNSS receiver with a Tallysman Accutenna® multi-band (L1/L2) dual feed patch. The state of the art GNSS receiver supports concurrent tracking of all four major constellations (GPS, BeiDou, Galileo and GLONASS) in multiple frequency bands. The multi-band (L1/L2) architecture is a highly effective method for the removal of ionospheric error. The TW5382 employs multi-stage filtering with low noise figure LNAs, combined with the dual feed Accutenna®, which greatly improves the rejection of multi-path signal interference, to offer exceptional performance to meet the most stringent timing applications.

Precision Timing

The TW5382 is designed to meet the strictest timing synchronization applications in 5G mobile networks on a global scale. The concurrent multi-band (L1/L2) access to all four satellite constellations improves the receiver's capability to deliver a quick, precise and reliable solution which is unaffected by ionospheric errors, and improved resilience to jamming.

The TW5382 timing module's multi-band (L1/L2) capability reduces the timing error under clear skies to less than 5 ns without the need for external GNSS correction service.

The TW5382 offers an optional master and slave configuration that features a differential timing mode that exchanges correction data with a neighboring TW5382 timing receiver via a RS-485 communication link. Under optimal conditions the timing accuracy can be further improved to less than 2.5 ns.

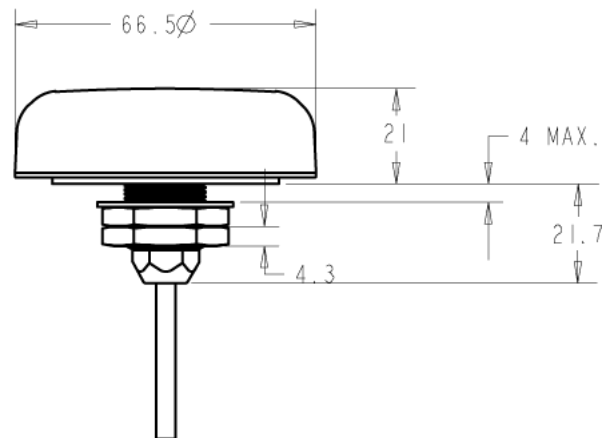

Mechanical Dimensions (mm)

Features

- Improved noise immunity via multi-band ublox ZED-F9T GNSS receiver
- Improved multi-path rejection with Dual feed Accutenna®
- Multi-band GNSS receiver is resilient to ionospheric errors
- High reliability timing with expansive constellation array
- Exceptional timing performance standalone without correction services
- T-RAIM to support the highest level of timing integrity
- Broad 5V-36V operation
- RS-485 differential signalling
- Industrial grade IP69K enclosure
- Rugged fixed mount
- Multiple cable lengths (5m, 15m and 25m)
- Available with conical radome

TW5382 Smart GNSS Antenna

Specifications

Antenna	
Architecture.....	Multi-band (L1/L2), Dual Feed
Axial Ratio.....	L1: < 1 dB typical.
Frequencies.....	GPS L1C/A L2C, GLO L1OF L2OF, GAL E1B/C E5b, BDS B1I B2I, QZSS L1C/A L2C
SBAS L1 C/A.....	WAAS, EGNOS, MSAS, GAGAN
Channels.....	184-channel u-blox F9 engine
Anti-jamming.....	Active CW detection

Interface	
Pwr, Gnd	
33-5382-07-yy-zz.....	Data, Timepulse, Optional TP2, RTCM IN or OUT: RS-422 levels.

Serial Protocol	
Output.....	NMEA 0183, UBX Binary, RTCM v3.3,
Baud Rate.....	Configurable
Update Rate (PVT).....	Configurable up to 20 Hz

Mechanical	
Dimensions.....	66.5 mm dia. x 21 mm H
Weight.....	135 g
Mounting Method.....	Industrial grade fixed Mount
Cable Length.....	5, 15, 25m with RJ45 termination

Electrical	
Voltages.....	5 V to 36 VDC
Current.....	0.5 Watts (nominal operating) Measured @ 5VDC supply

Environmental	
Operating Temperature.....	-40°C to +85°C
Storage Temperature.....	-40°C to +85°C
Weatherproof.....	IP69K
Shock.....	Vertical axis 50G, other axis 30G 3 axis sweep – 15 min
Vibration.....	10-200 Hz log sweep 3G

Sensitivity	
Tracking & Nav.....	-166 dBm
Reacquisition.....	-160 dBm
Hot starts.....	-157 dBm
Cold starts.....	-148 dBm

Acquisition	
Cold start.....	26 sec
Aided start.....	2 sec
Reacquisition.....	1 sec

Horizontal Position Accuracy (4 Constellations)	
Standard PVT.....	2m CEP

Timing	
Timing Accuracy.....	<5 ns (<2.5 ns Differential Mode)
Time Pulse Jitter.....	± 4 ns
Time Pulse resolution.....	8 ns
Survey-in period.....	Configurable
Integrity Reports.....	T-RAIM active, phase uncertainty, Time pulse/duty-cycle, inter-constellation biases

Ordering Information:

33-5382-07-yy-zz-PC0 (RJ45; Data and Timepulse, Optional TP2, RTCM IN or OUT: RS-422 levels; PC0 = NMEA out, no adaptor cable.)

yy = Radome (00=grey conical, 10=grey low profile, 01=white conical, 11=white low profile)
zz = Cable length in meters. Standard is 5m. (15m and 25m are special order only)

33-5382-07-yy-zz-PC0 SDK Test Adaptor required for programming 33-0095-10

About Calian GNSS: With global headquarters and manufacturing in Ottawa, Canada, Calian GNSS is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian GNSS' mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.calian.com/GNSS

Contact us:
info.gnss@calian.com
T: +1 613 591-3131

© 2024 Calian GNSS Ltd. All rights reserved. Calian, the "Confidence. Engineered." tag line and the Calian logo are trademarks or registered trademarks of Calian GNSS Ltd. and/or its affiliates in Canada and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. This document contains Calian proprietary information. Use, disclosure, copying or distribution of information requires the written permission of Calian GNSS Ltd. The information presented is subject to change without notice. Calian assumes no responsibility for any errors or omissions in this document. Calian GNSS Ltd. hereby disclaims any and all warranties and liabilities of any kind.

Calian GNSS Ltd.
36 Steacie Drive,
Ottawa ON
K2K 2A9 Canada

www.calian.com/GNSS